## **PRODUCT SPECIFICATION SHEET**



## **Product Figure Description:**


- Three Side Viewing Linear Wall Mounted & Wall Recessed & Free-standing Electric fireplace
- Two levels heating functions, first step heating 900W, Second step heating 1800W
- Five levels flame brightness adjustment
- Multiple 15 colors LED flames
- Multiple 15 colors LED ember-bed colors
- Multiple 15 colors LED down-light colors
- Three levels flame speed adjustment
- Temperature setting:

Display value		0	1	2	3	4	5	6	7	8	9	10
Temperature	°C	20	21	22	23	24	25	26	27	28	29	30
	°F	68	70	72	74	76	78	80	82	84	86	88

- Equipped with timer settings from 0.5-8 hours
- Equipped with realistic fire cracking sound
- Operate with multi-function remote control, touch control panel and smart App.
- Realistic crystals, drift logs for fuel bed
- Flame only mode available (no heat).
- Safety children lock available for heating (Heat Disabled)
- Safety thermal cut OFF device equipped
- Tempered front glass panel
- Heavy gauge power cord at least 180cm or 71" in length
- Suitable for room from 20-30 m²
- ISTA-3A Package

# **PRODUCT SPECIFICATION SHEET**

## **Product Dimension**

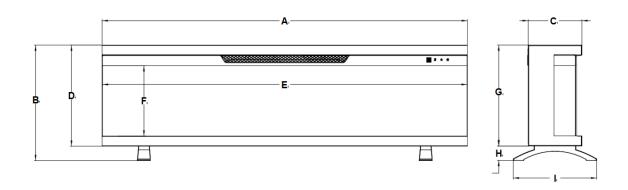

PRODUCT DIMENSIONS (mm)									
Model Number	Α	В	С	D	E	F	G	н	1
EF-U107	42" [1070mm]	15.75" [400mm]	7.35" [186.6mm]	13.78" [350mm]	41.93"	9.6" [243.8mm]	13.78" [350mm]	2-3/8" [60mm]	11-7/16" [290mm]
EF-U127	50"	15.75"	7.35" [186.6mm]	13.78" [350mm]	49.92"	9.6" [243.8mm]	13.78"	2-3/8" [60mm]	11-7/16" [290mm]
EF-U152	60"	15.75"	7.35" [186.6mm]	13.78"	59.92"	9.6" [243.8mm]	13.78"	2-3/8" [60mm]	11-7/16" [290mm]
EF-U183	72" [1830mm]	15.75"	7.35" [186.6mm]	13.78"	71.89"	9.6" [243.8mm]	13.78"	2-3/8" [60mm]	11-7/16" [290mm]

## **Product Parameter:**

Voltage:	220-240V		Ember Bed Color:	15 Colors		
Frequency:	50Hz		Down-Light Color:	15 Colors		
				Remote control,		
Low Heat:	900W		Control Method:	Touch Control panel,		
				Smart APP		
High Heat:	1800W		Media Decoration:	Crystals, Drift logs		
Product Color:	Black		Temperature setting:	20-30°C		
Flame Color:	15 Colors		Timer setting:	0.5-8Hours		
Flame Brightness:	5 Levels		Fire Cracking:	Yes		
Flame Speed:	3 Levels	Certificate	Hardware Kit:	Included		