PRODUCT SPECIFICATION SHEET



Product Figure Description:


- Wall Mounted & Wall Recessed & Free-standing Electric fireplace
- Two levels heating functions, first step heating 900W, Second step heating 1800W
- Five levels flame brightness adjustment
- Multiple 15 colors LED flames
- Three levels flame speed adjustment
- Temperature setting:


Display value	,	0	1	2	3	4	5	6	7	8	9	10
Temperature	°C	20	21	22	23	24	25	26	27	28	29	30
	°F	68	70	72	74	76	78	80	82	84	86	88

- Equipped with timer settings from 0.5-8 hours
- Equipped with realistic fire cracking sound
- Operate with multi-function remote control, touch control panel and smart App.
- Realistic crystals, drift logs for fuel bed
- Flame only mode available (no heat).
- Safety children lock available for heating (Heat Disabled)
- Safety thermal cut OFF device equipped
- Tempered front glass panel
- Heavy gauge power cord at least 180cm or 71" in length
- Suitable for room from 20-30 m²
- ISTA-3A Package

PRODUCT SPECIFICATION SHEET

Product Dimension

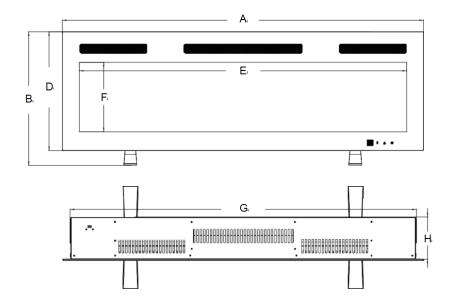



PRODUCT DIMENSIONS (mm)											
Model Number	Α	В	С	D	E	F	G	Н	ı	J	K
EF-M107	42" [1067mm]	16" [405mm]	5" [128mm]	13.78" [350mm]	38.07" [967mm]	8.07"	40.24" [1022mm]	4.88" [124mm]	13.11" [333mm]	2.36" [60mm]	11.42" [290mm]
EF-M127	50"	16" [405mm]	5" [128mm]	13.78"	46.06"	8.07"	48.23" [1225mm]	4.88"	13.11" [333mm]	2.36" [60mm]	11.42" [290mm]
EF-M152	60" [1524mm]	16" [405mm]	5" [128mm]	13.78" [350mm]	56.06"	8.07"	58.23" [1479mm]	4.88" [124mm]	13.11" [333mm]	2.36" [60mm]	11.42" [290mm]
EF-M183	72" [1828mm]	16" [405mm]	5" [128mm]	13.78" [350mm]	68.03" [1728mm]	8.07" [205mm]	70.2" [1783mm]	4.88" [124mm]	13.11" [333mm]	2.36" [60mm]	11.42" [290mm]

Product Parameter:

Voltage:	220-240V		Ember Bed Color:	N/A		
Frequency:	50Hz		Down-Light Color:			
				Remote control,		
Low Heat:	900W		Control Method:	Touch Control panel,		
				Smart APP		
High Heat:	1800W		Media Decoration:	Crystals, Drift logs		
Product Color:	Black		Temperature setting:	20-30°C		
Flame Color:	15 Colors		Timer setting:	0.5-8Hours		
Flame Brightness:	5 Levels		Fire Cracking:	Yes		
Flame Speed:	3 Levels	Certificate	Hardware Kit:	Included		